




沈阳神雕塔机制造有限公司
SHENYANG SHENDIAO TOWER CRANE MANUFACTURE CO.,LTD.

TOWER CRANE
SS270/70/32
(K35/32)

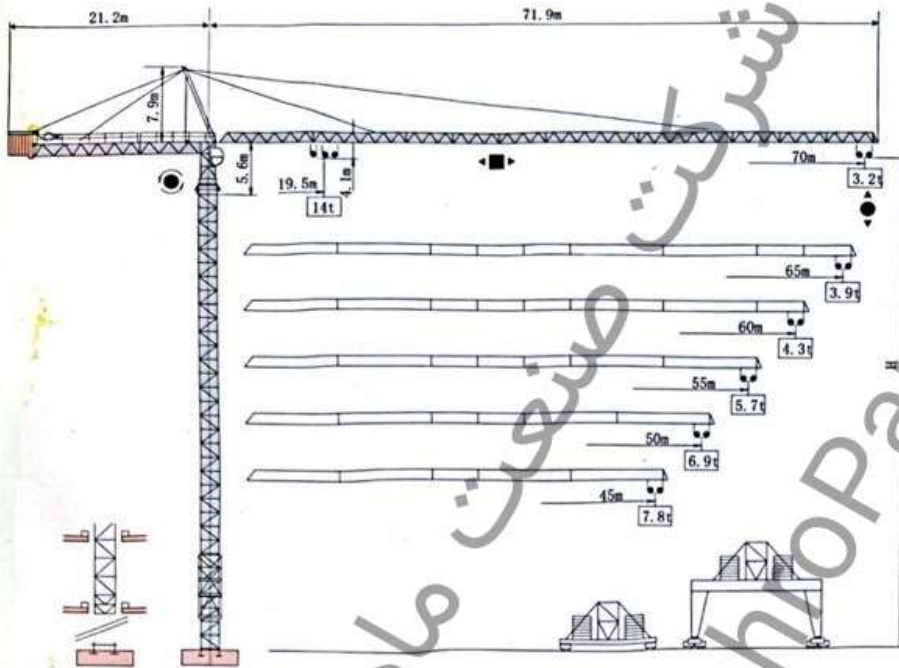


塔身截面 Mast: 2m x 2m

楼层 (Floor)	高度 (Height)
14	51.2
13	48.2
12	45.2
11	42.2
10	39.2
9	36.2
8	33.2
7	30.2
6	27.2
5	24.2
4	21.2
3	18.2
2	15.2
1	12.2

塔身重量: 84t

内爬塔机 Climbing crane

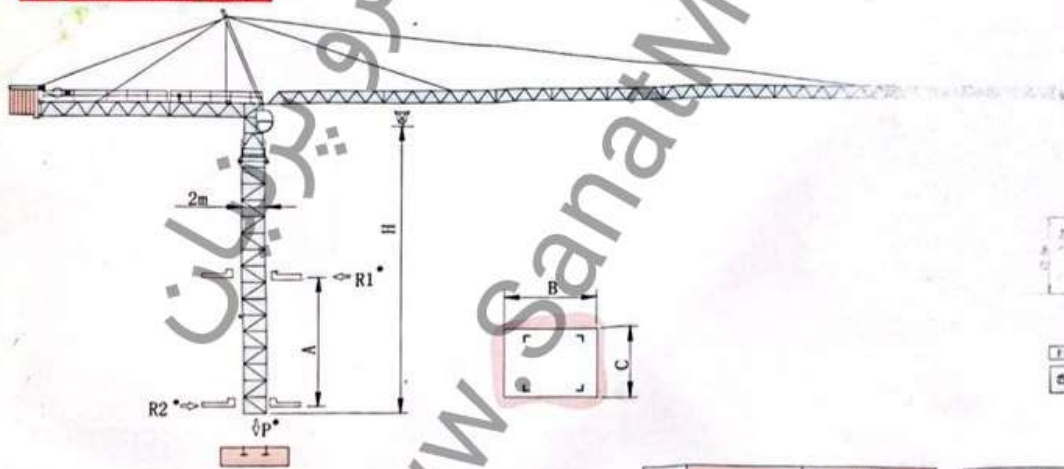

楼层 (Floor)	高度 (Height)
14	56.6
13	53.6
12	50.6
11	47.6
10	44.6
9	41.6
8	38.6
7	35.6
6	32.6
5	29.6
4	26.6
3	23.6
2	20.6
1	17.6

塔身重量: 97t

- A 内爬框架距离 Distance between collars
- H 塔吊高度 Crane height
- P 塔吊自重(工作状态) Crane weight(In service)
- R1 水平反力最大 Horizontal reaction max
- R2 水平反力最大 Horizontal reaction max
- B 楼板开口 Floor notch
- C 楼板开口 Floor notch

	2m
A	12m~19m
B	2.58m
C	2.17m
H	45.6m
R1	31.5t~19.9t
R2	28t~16.4t
P	102t

F 反力 Reactions
• 工作状态 In service
• 非工作状态 Out of service
⊕ 自重 Self-load

不用载重及配重 Without load and counter-weight
最大臂长及标准 with longest jib and standard height
高度时的自重 Self-load at height

- 工作状态无系数
- No parameter in working service

CamScanner